DOSATRON®

WATER POWERED DOSING TECHNOLOGY

SCHEMATICS

Dosatron Liquid Dispenser
Model # DM11F - 11 GPM
1:128 fixed
1.5 - 85 PSI
¾" NPT Connection

Suggested Installation:
200 mesh/80 micron water filter prior to unit
One-way check valve downstream from unit for water hammer protection

Suggested Maintenance Interval:
Replace injection seals every 12 months

DOSATRON SALES & SERVICE - NORTH & CENTRAL AMERICA

Dosatron International, Inc.
Phone: 727-443-5404 Service: (800) 523-8499
Fax: 727-447-0591
www.dosatronUSA.com

DM11F

11 GPM - 1:128
2.5 m^3/h - 0.8%
1.5 - 85 psi
0.1 - 6 bar

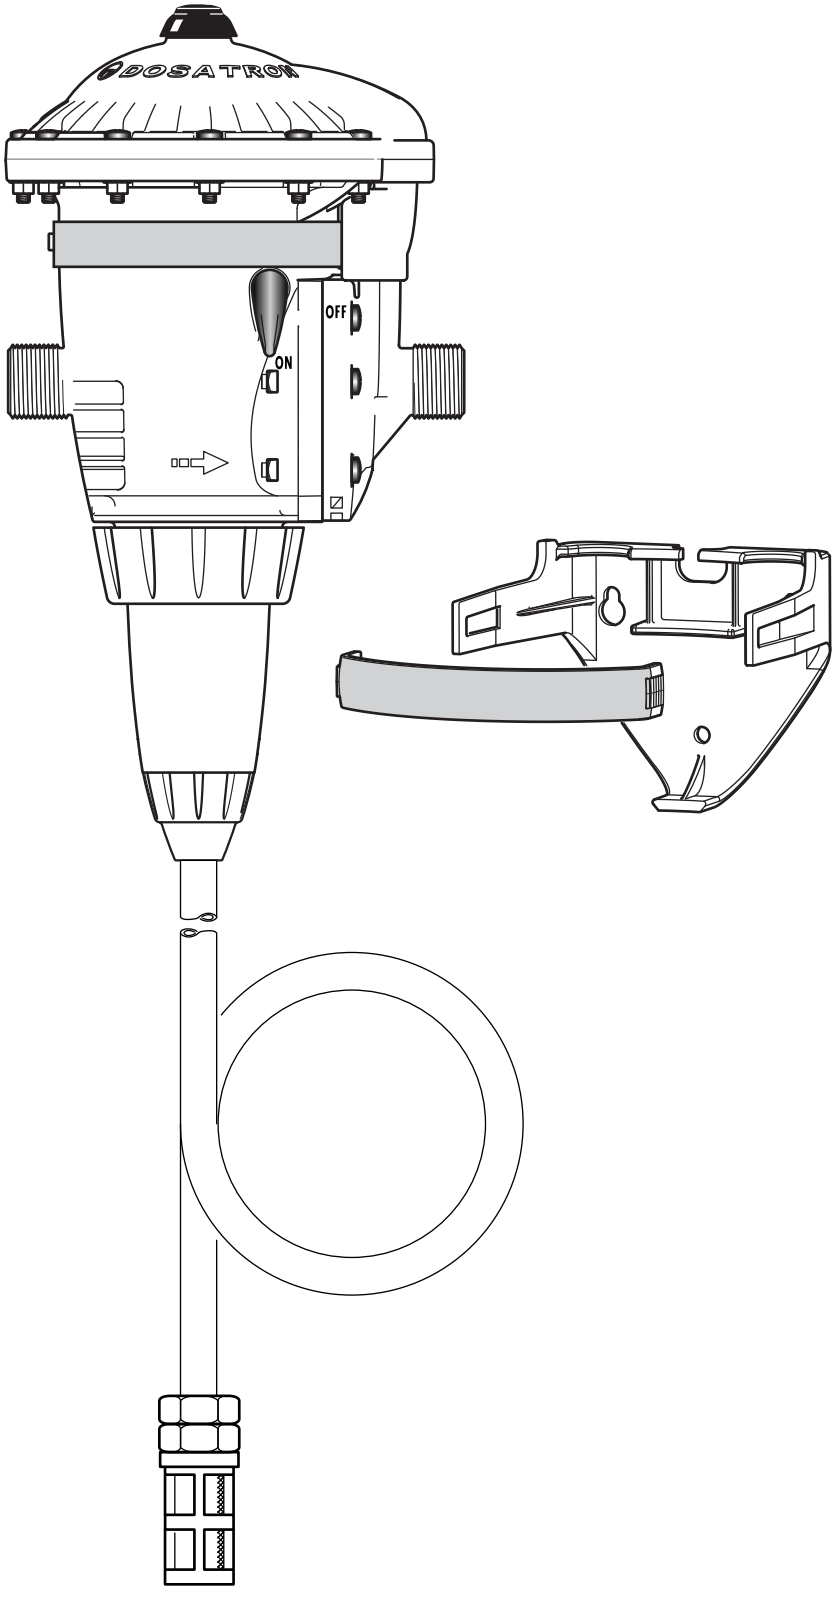

© DOSATRON INTERNATIONAL S.A.S. 2009
DM11F/0209/D1

DM11F

11 GPM - 1:128
2.5 m^3/h - 0.8%
1.5 - 85 psi
0.1 - 6 bar

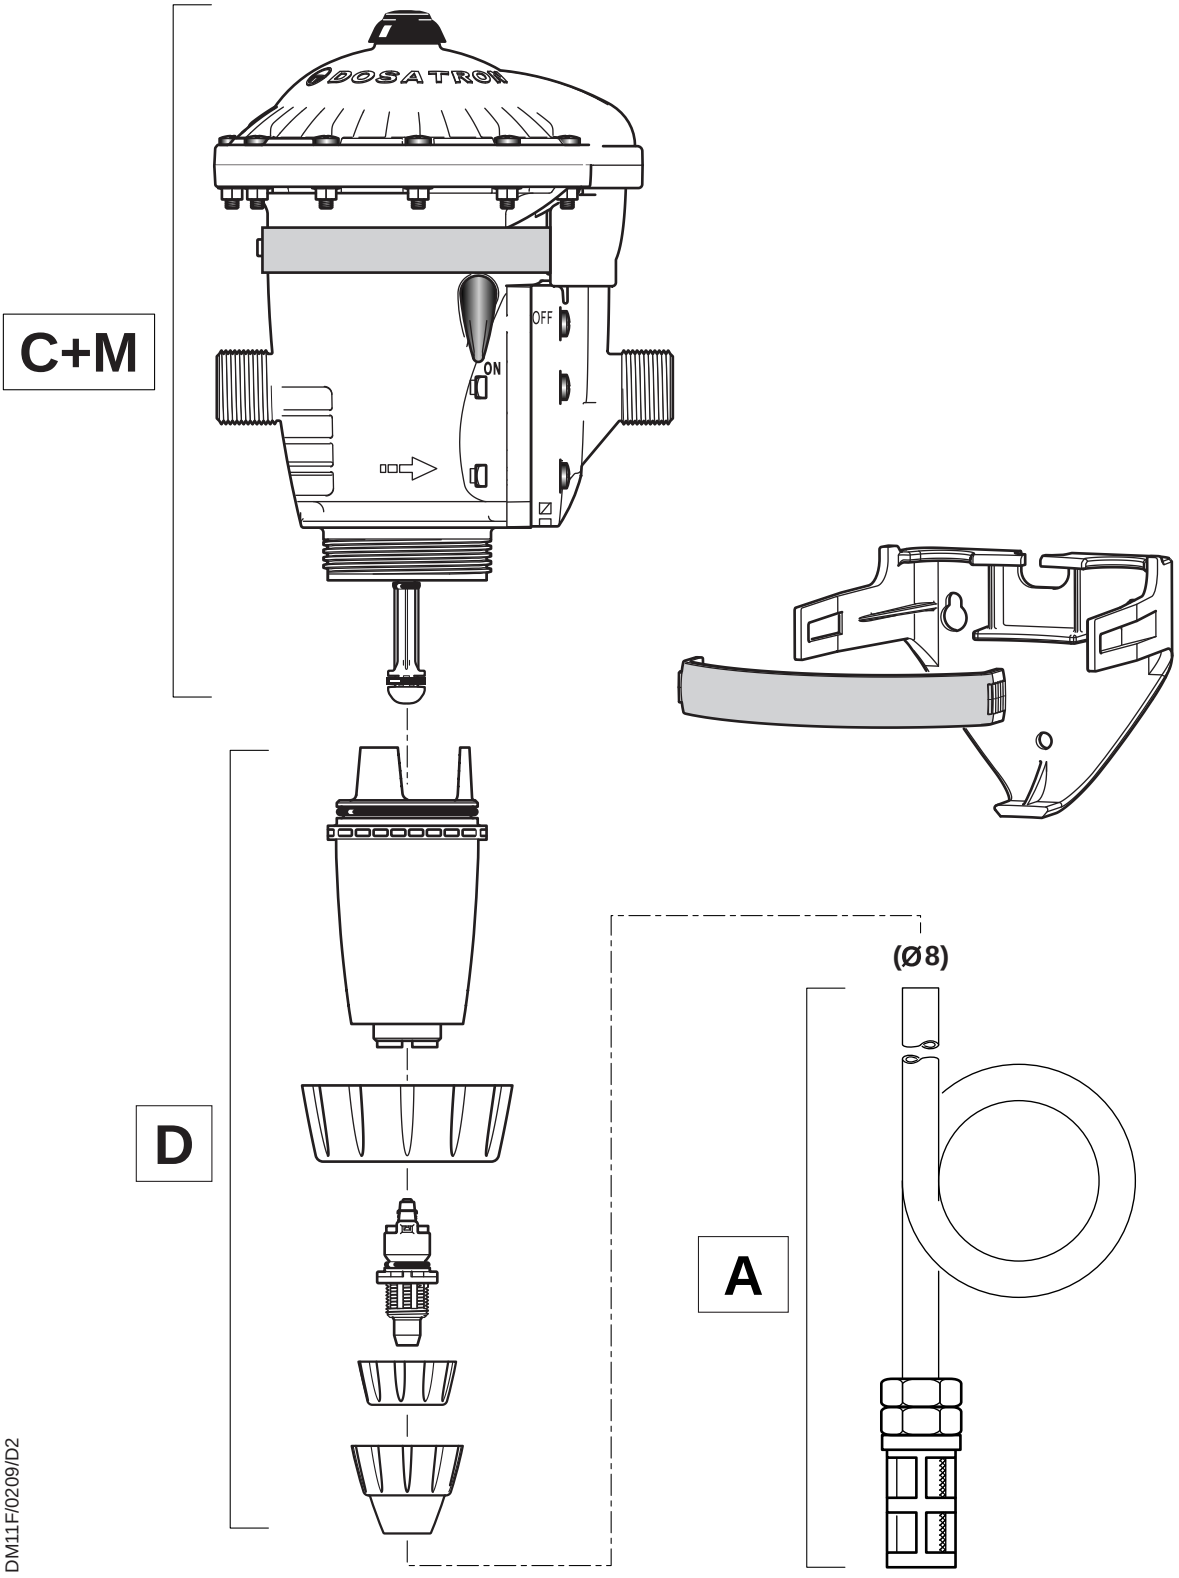

© DOSATRON INTERNATIONAL S.A.S. 2009
DM11F/0209/D2

DM11F

11 GPM - 1:128
2.5 m^3/h - 0.8%
1.5 - 85 psi
0.1 - 6 bar

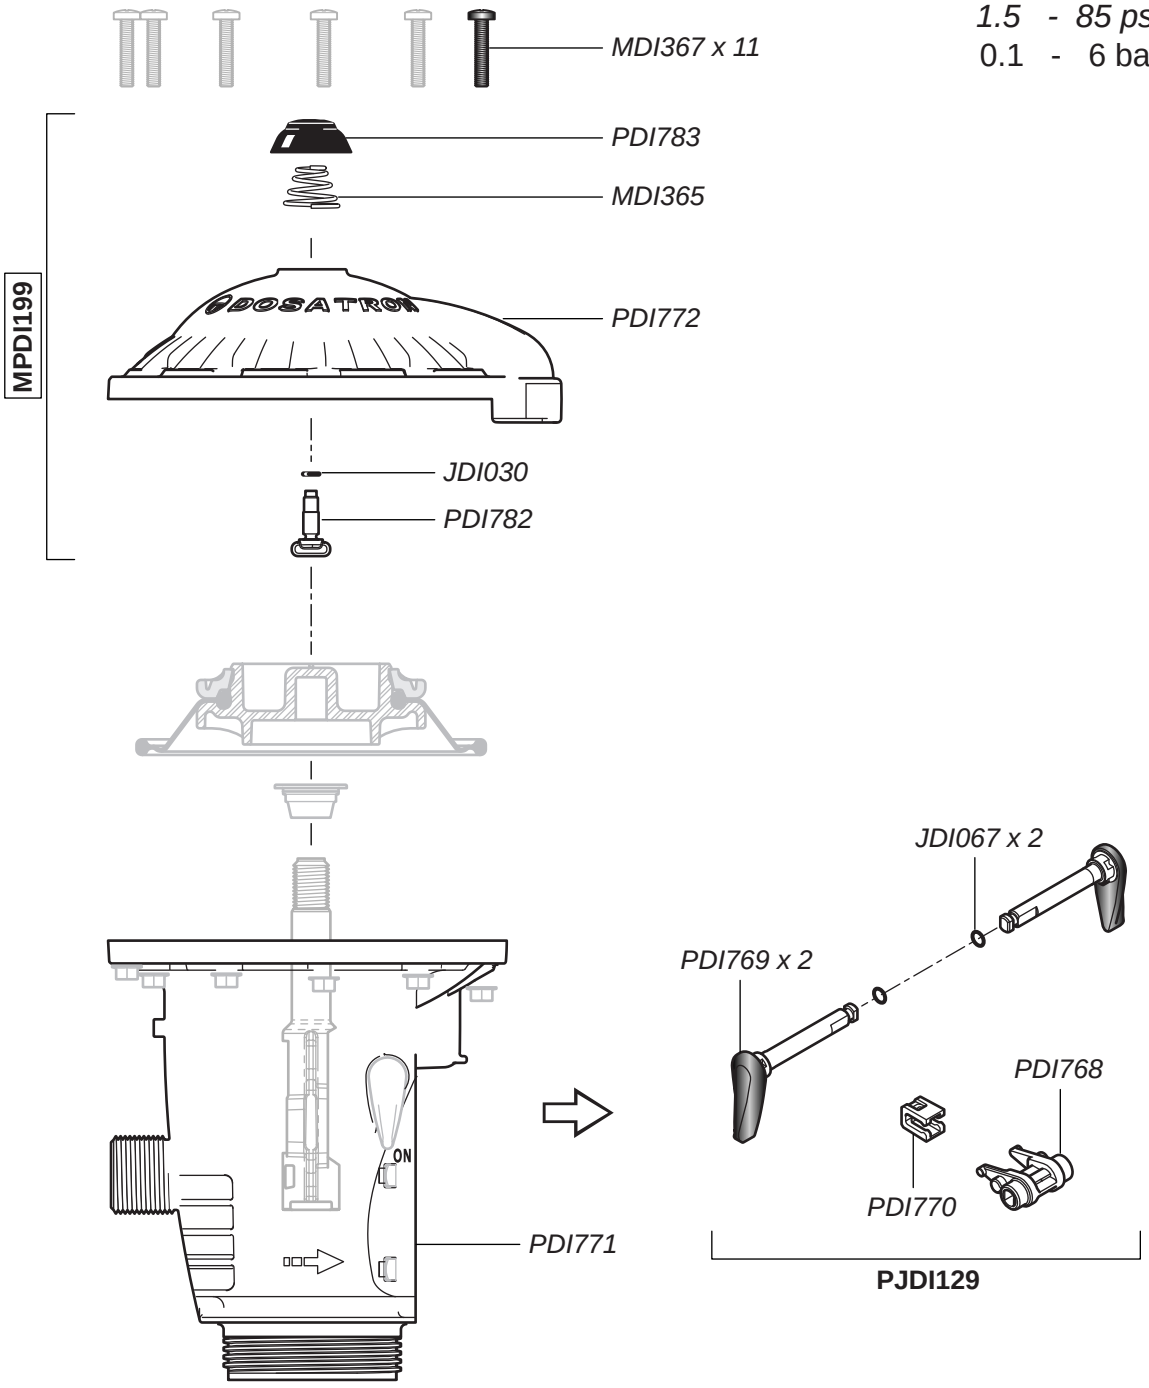

© DOSATRON INTERNATIONAL S.A.S. 2009
DM11F/0209/D3

C+M

DM11F

11 GPM - 1:128
2.5 m^3/h - 0.8%
1.5 - 85 psi
0.1 - 6 bar

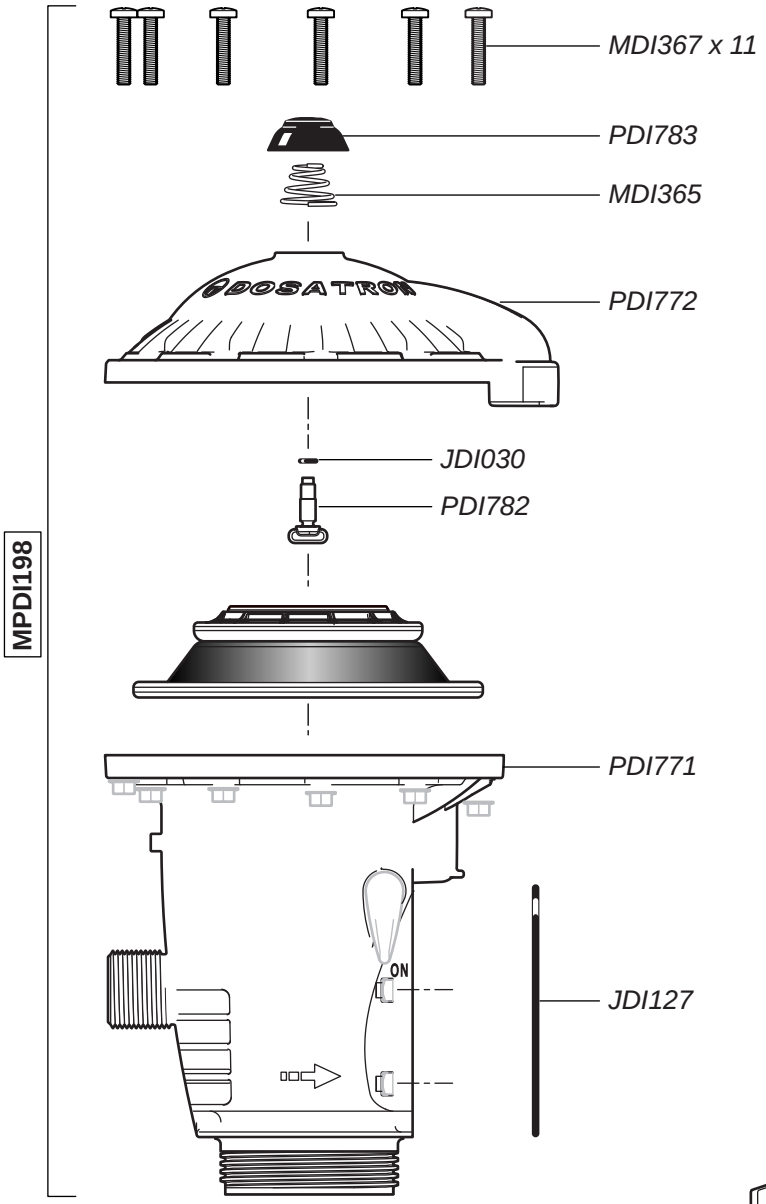

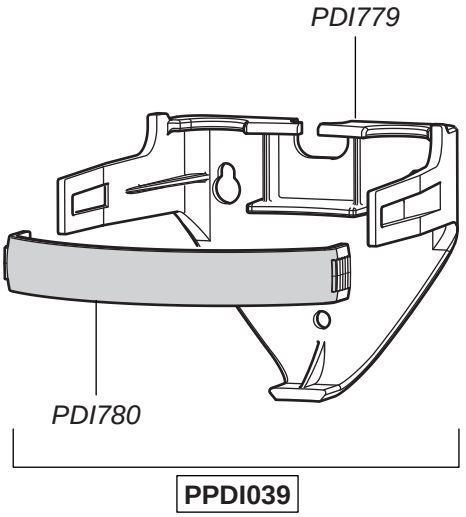

© DOSATRON INTERNATIONAL S.A.S. 2009
DM11F/0209/D4

C+M

DM11F

11 GPM - 1:128
2.5 m^3/h - 0.8%
1.5 - 85 psi
0.1 - 6 bar

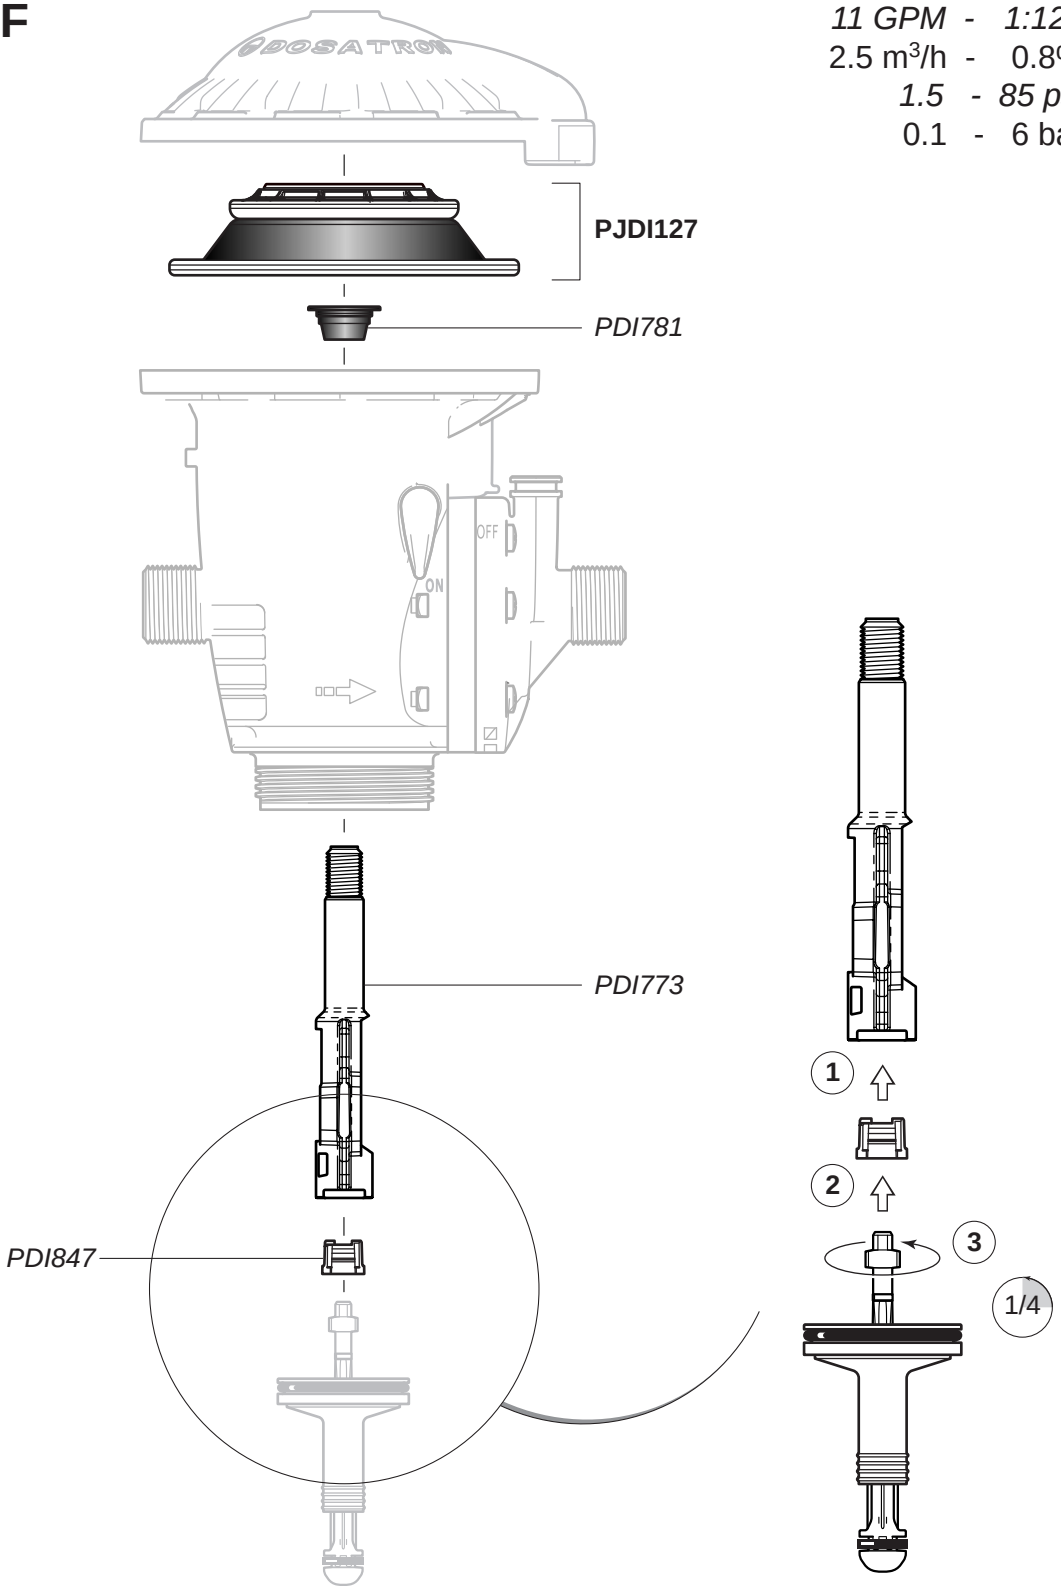

© DOSATRON INTERNATIONAL S.A.S. 2009
DM11F/0209/D5

C+M

DM11F

11 GPM - 1:128
2.5 m^3/h - 0.8%
1.5 - 85 psi
0.1 - 6 bar

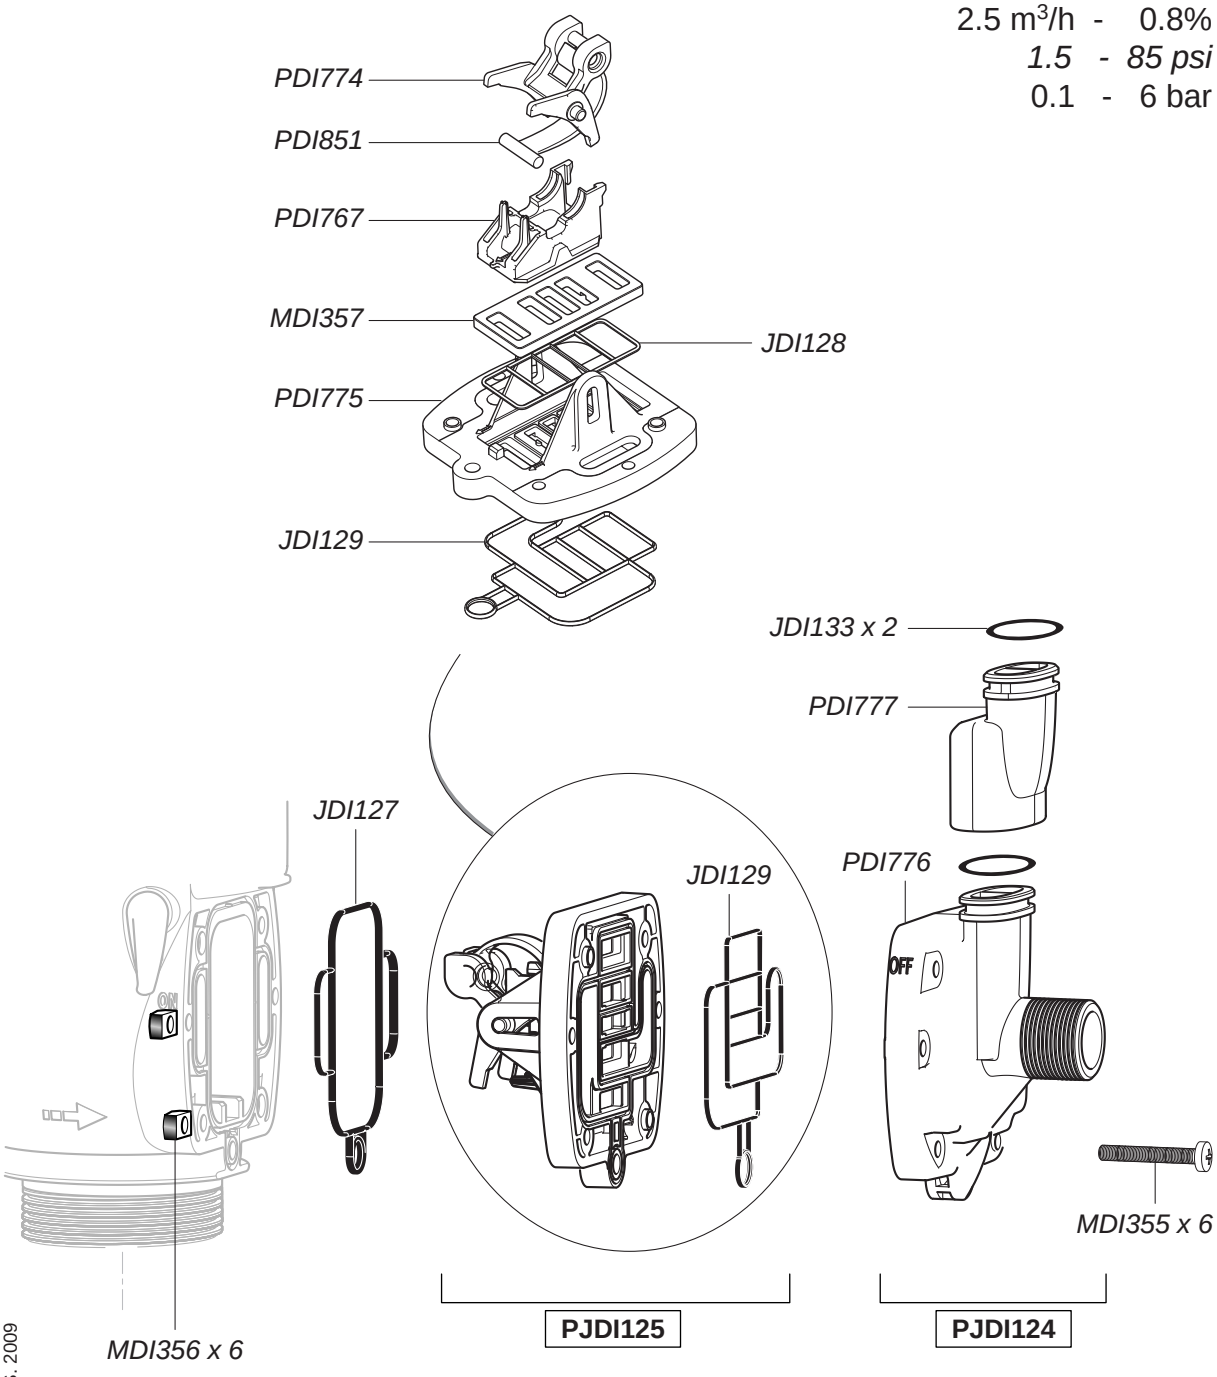

© DOSATRON INTERNATIONAL S.A.S. 2009
DM11F/0209/D6

C+M

DM11F

11 GPM - 1:128
2.5 m^3/h - 0.8%
1.5 - 85 psi
0.1 - 6 bar

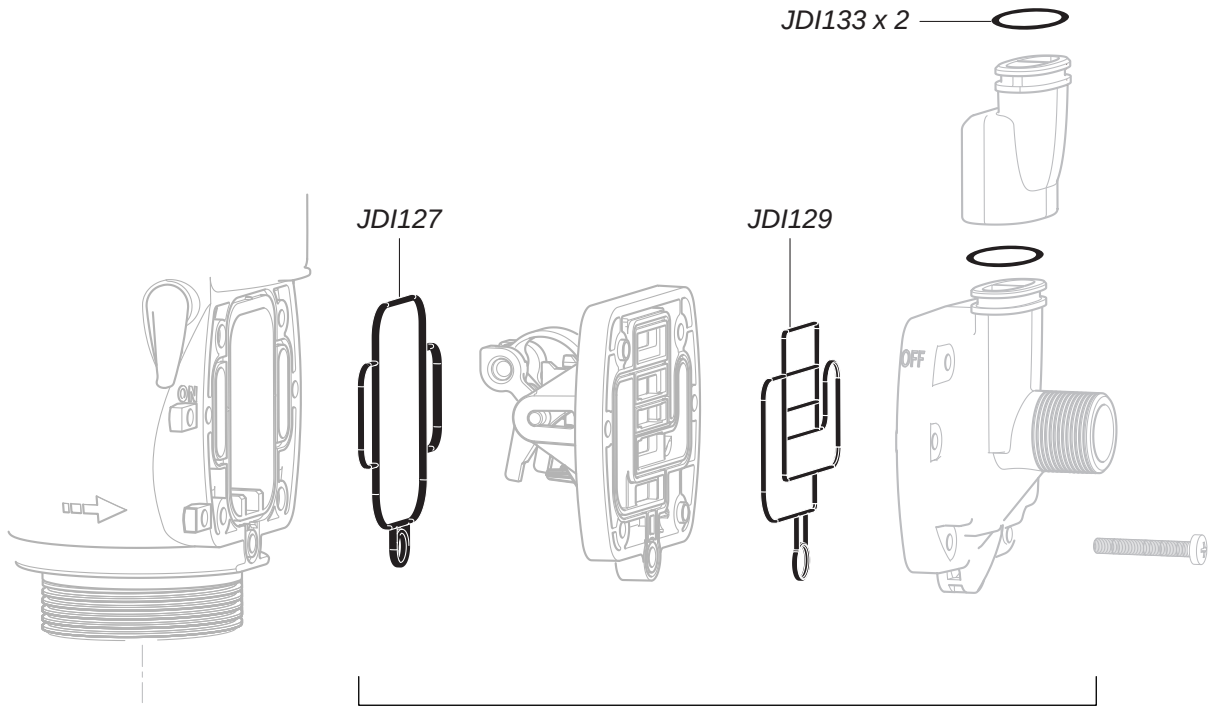

EMDI007

© DOSATRON INTERNATIONAL S.A.S. 2009
DM11F/0209/D7

C+M

DM11F

11 GPM - 1:128
2.5 m^3/h - 0.8%
1.5 - 85 psi
0.1 - 6 bar

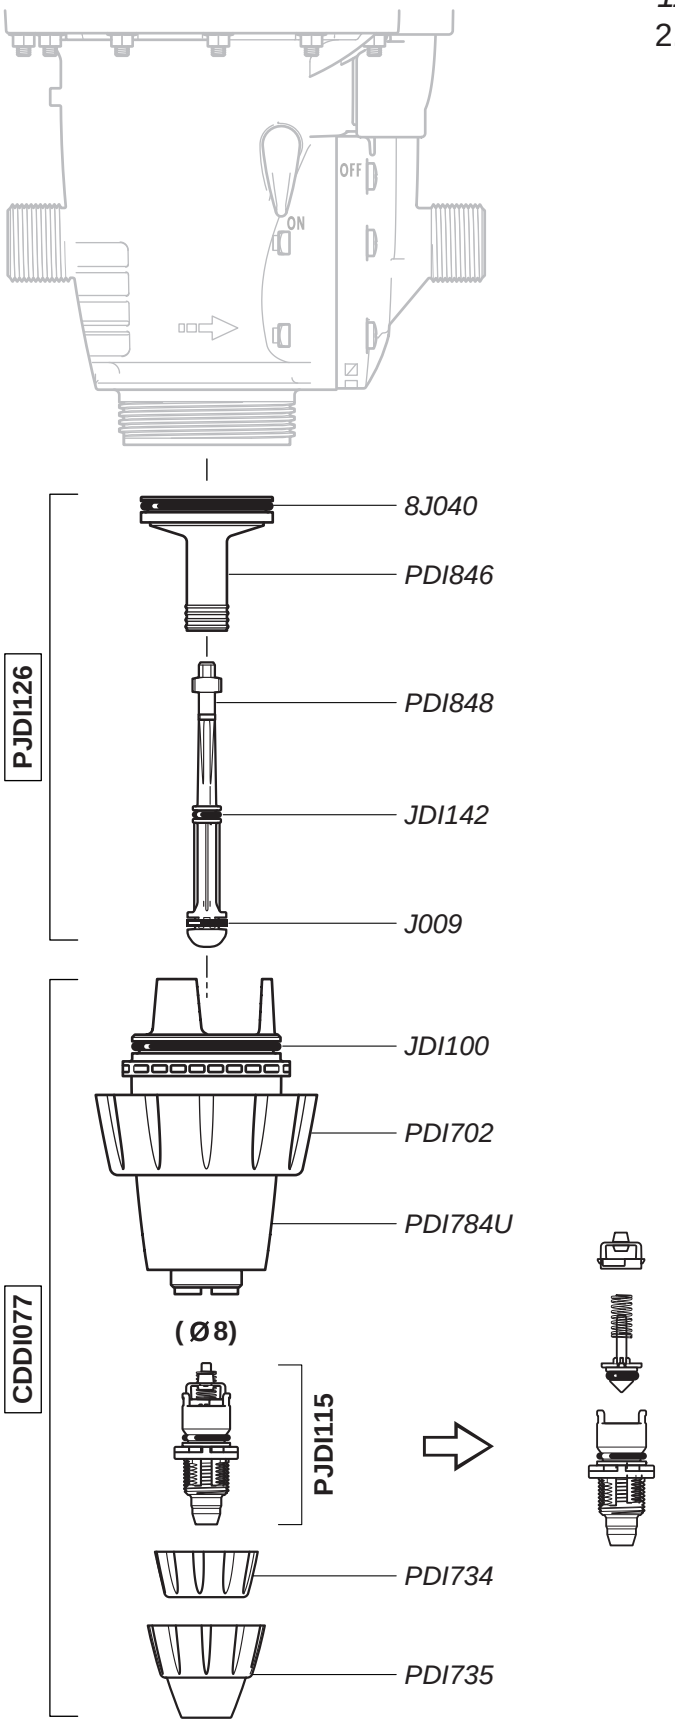

© DOSATRON INTERNATIONAL S.A.S. 2009
DM11F/0209/D8

D

DM11F

11 GPM - 1:128
2.5 m^3/h - 0.8%
1.5 - 85 psi
0.1 - 6 bar

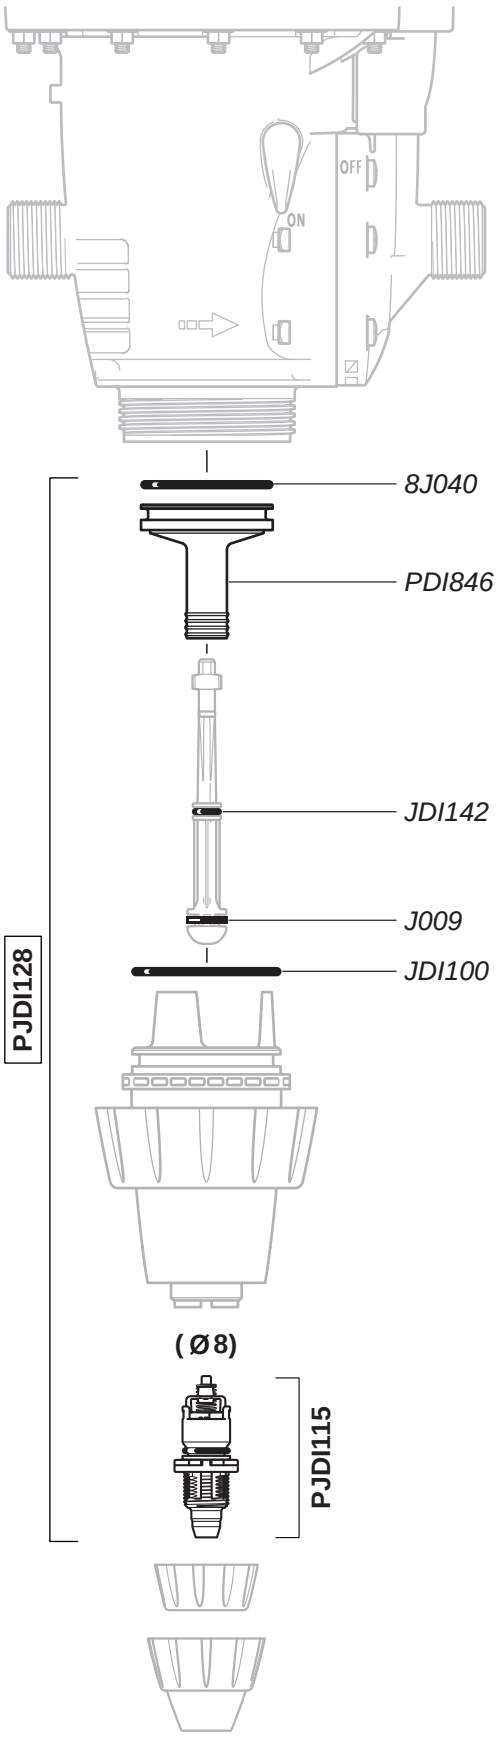

© DOSATRON INTERNATIONAL S.A.S. 2009
DM11F/0209/D9

D

DM11F

11 GPM - 1:128
2.5 m^3/h - 0.8%
1.5 - 85 psi
0.1 - 6 bar

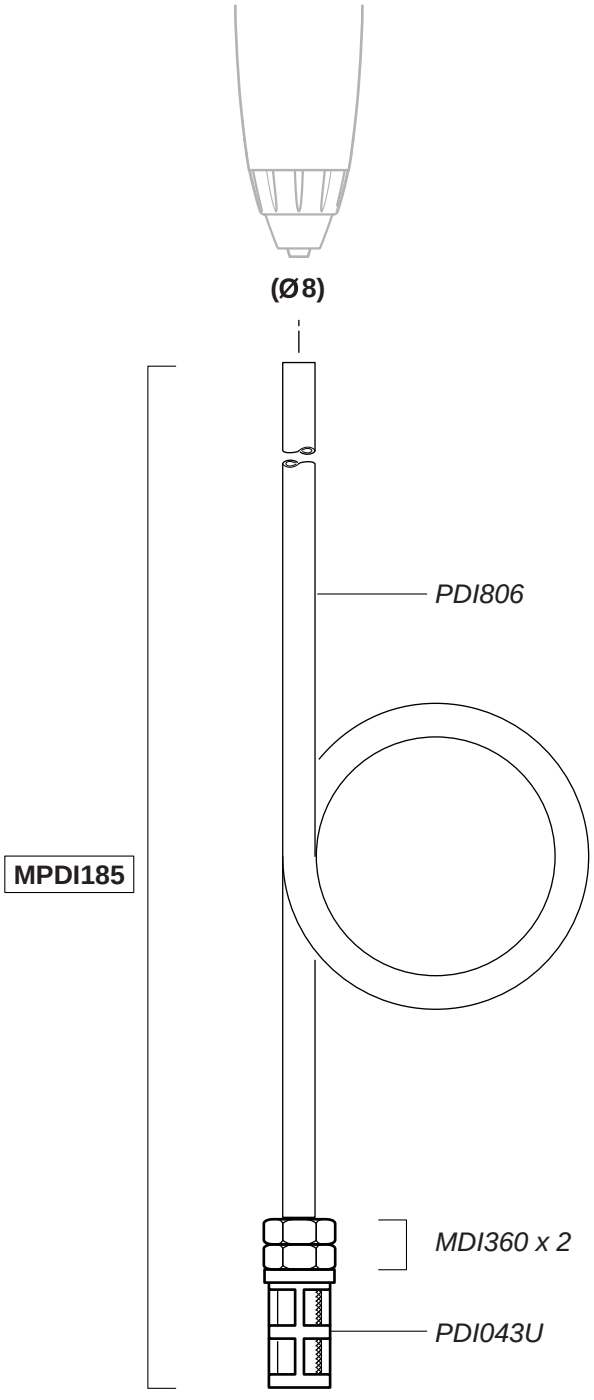

© DOSATRON INTERNATIONAL S.A.S. 2009
DM11F/0209/D10

A

DM11F

11 GPM - 1:128
2.5 m^3/h - 0.8%
1.5 - 85 psi
0.1 - 6 bar

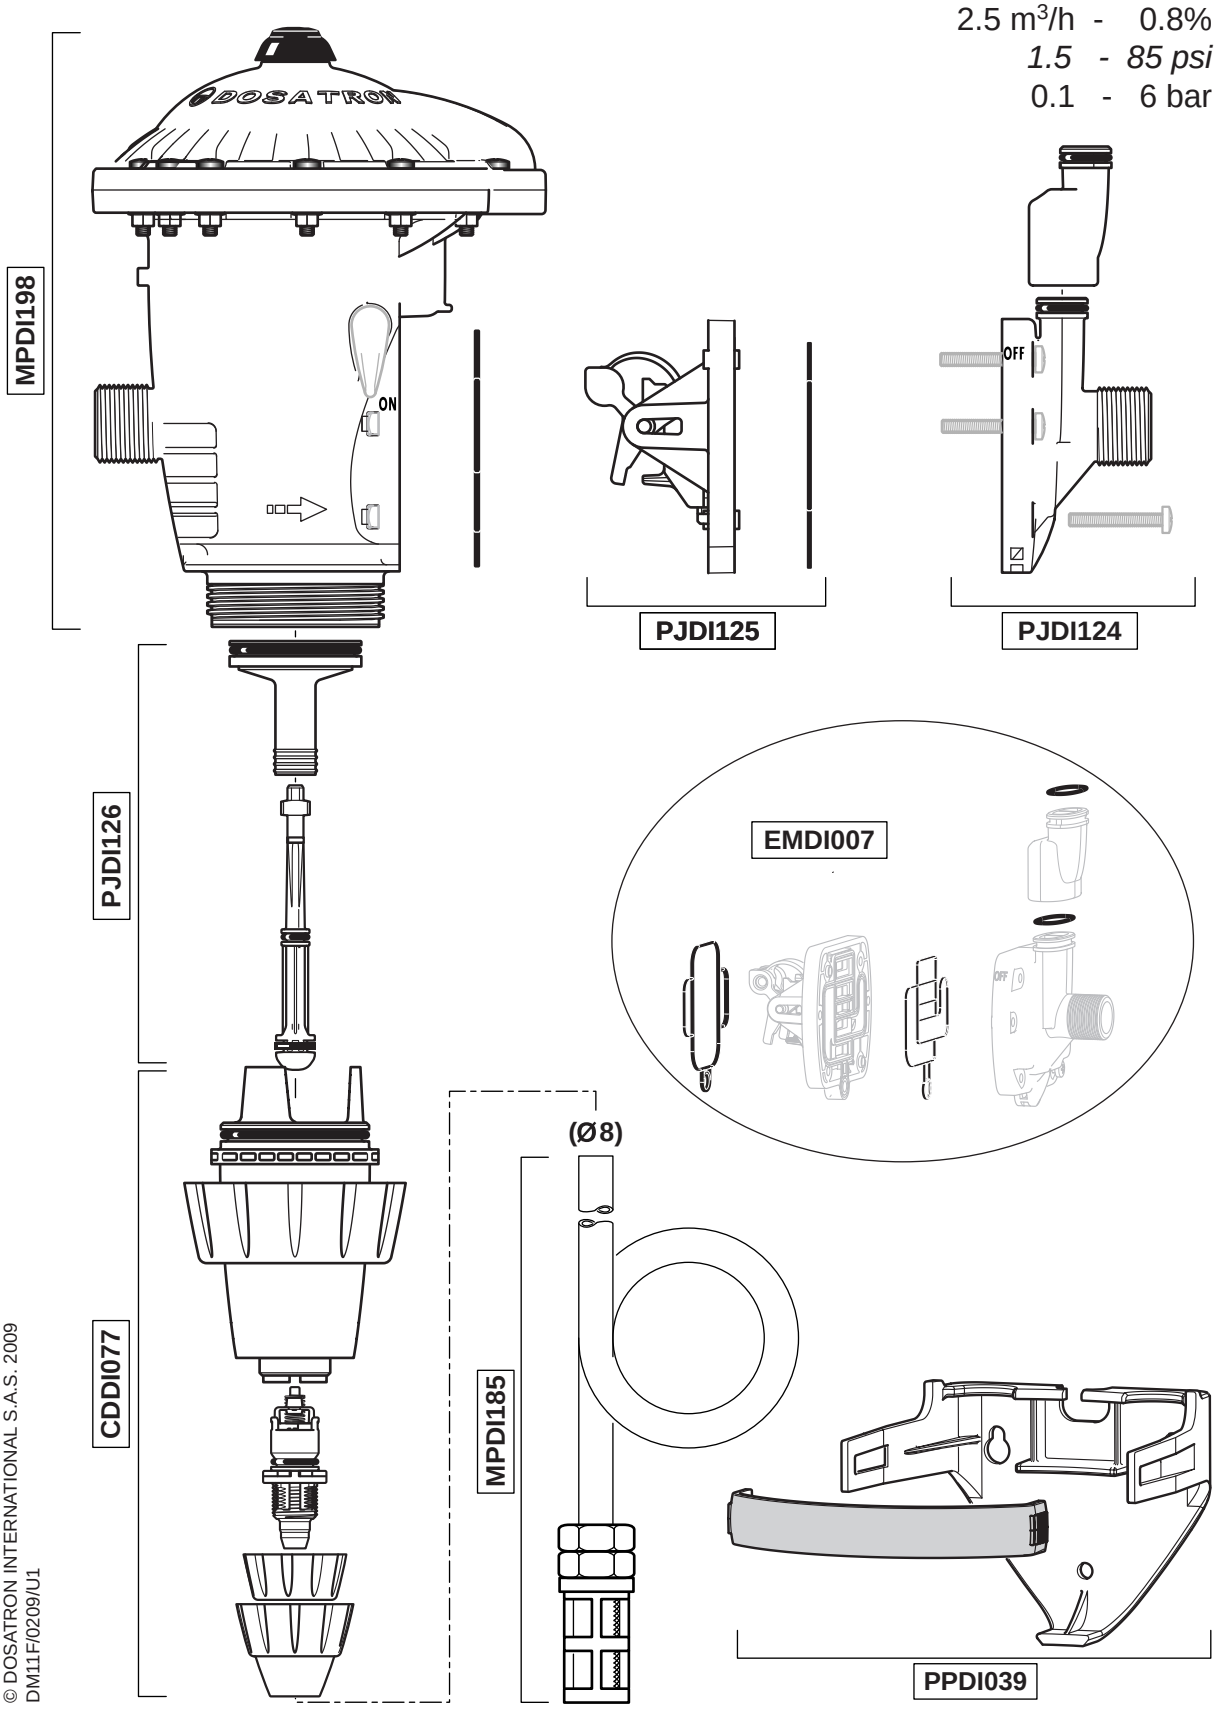

© DOSATRON INTERNATIONAL S.A.S. 2009
DM11F/0209/U1

DM11F

11 GPM - 1:128
2.5 m^3/h - 0.8%
1.5 - 85 psi
0.1 - 6 bar

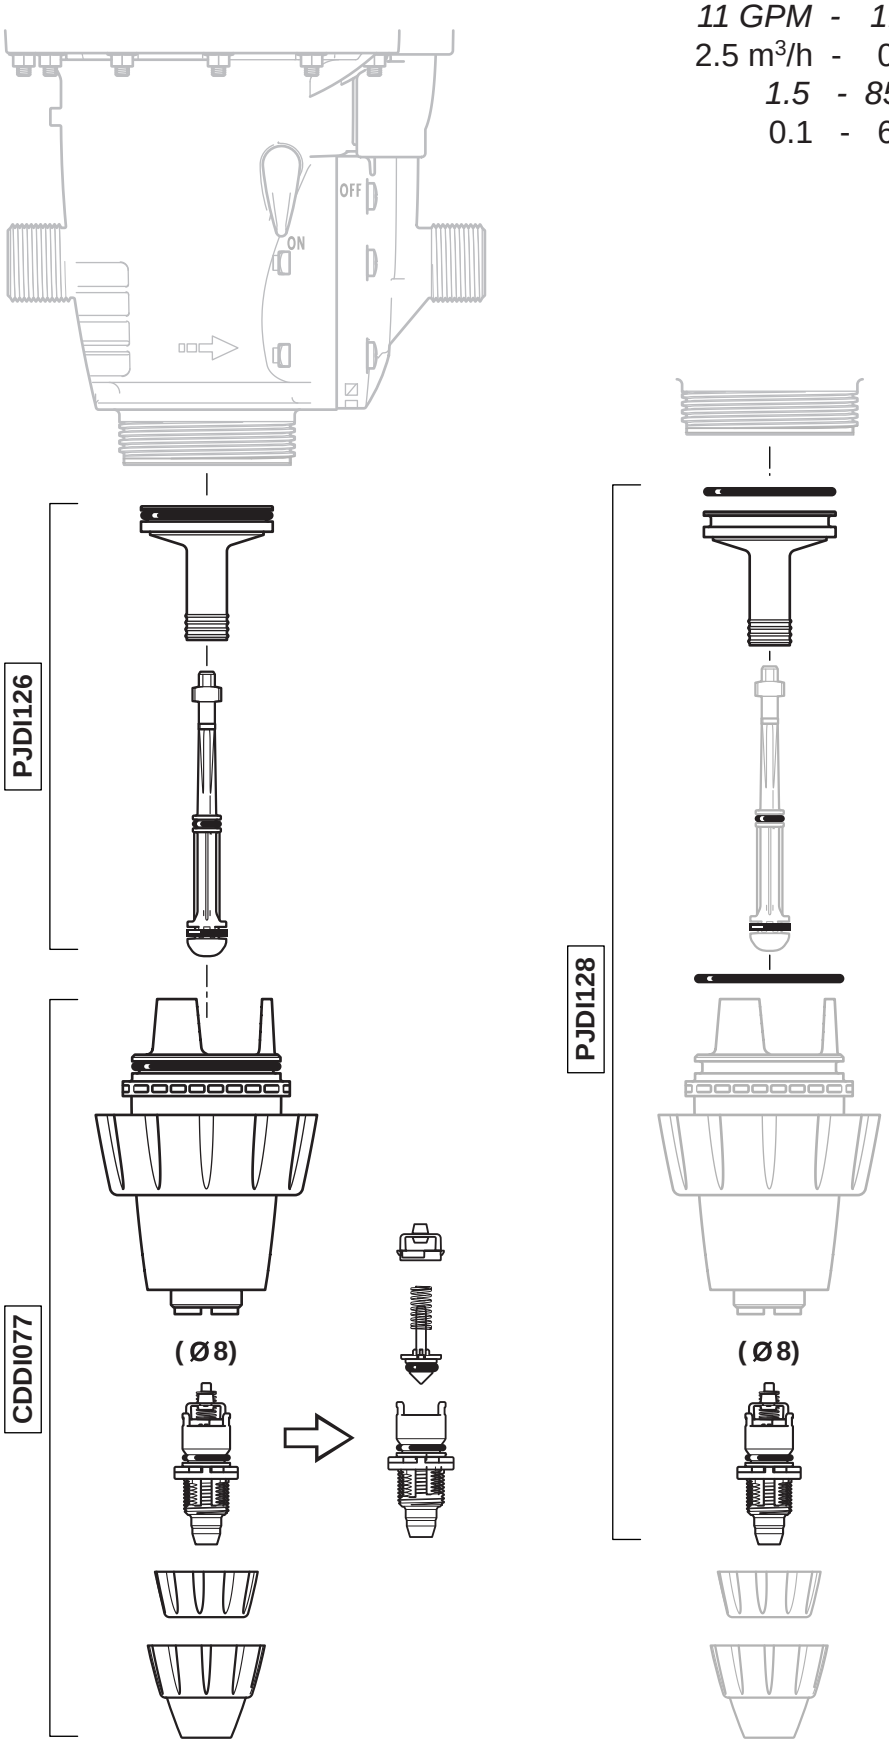

© DOSATRON INTERNATIONAL S.A.S. 2009
DM11F/0209/U2