

## PLC Saver user guide


The PLC Saver saves you time and makes it easy to store or transfer PLC configuration and settings.

The PLC Saver stores a complete copy of a PLC's configuration and settings in only seconds. This allows you to keep a backup of your configuration and lighting programs. You can also use the PLC Saver to transfer the information to other PLCs. This means you can set up a PLC in seconds!

The PLC Saver works with the both the PLC-1 and PLC-2 Programmable Lighting Controls.

### Saving and restoring settings

1. Loosen the four screws holding the cover in place and then gently remove the display from the unit.
2. Locate connector J3 as shown to the right.
3. Plug the PLC Saver into the connector.
4. Scroll to **Configuration** and then press **Select**.
5. Scroll to **PLC Saver** and then press **Select**.
6. Press **Up** or **Down** to select **Save** if you want to save your settings on the PLC Saver or **Restore** if you want to transfer the settings from the PLC Saver to the PLC and then press **Select**.
7. Press **Up** or **Down** to select **Yes** and then press **Select**.  
The PLC transfers your settings. This takes three to five seconds. The display will show **Done** when the process is complete.
8. Remove the PLC Saver from the connector.
9. Place the cover on the enclosure and then fasten it in place using the four screws.

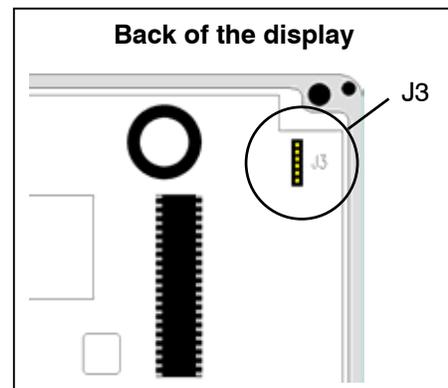

On the back of the PLC Saver is a white label. Write down a description of which settings are on the PLC Saver. This helps you identify which settings belong to which control.

#### Back of the PLC Saver

*PLC settings—brooder room 1*

Phason Inc.  
2 Terracon Place  
Winnipeg, Manitoba, Canada  
R2J 4G7

Phone: 204-233-1400  
Fax: 204-233-3252

E-mail: support@phason.ca  
Web site: www.phason.ca