




TROJAN SPECIALTY PRODUCTS


NIPPLE WATERFLOW ADJUSTMENT INSTRUCTIONS

The following are steps to adjust the water flow on Trojan Drinking nipples.


1. Remove the screen from the orifice. (The orifice is the plastic piece screwed into the back of your nipple). Push the screen to the side and it will pop right out. Your screen could be manufactured from plastic or be a metal dome screen. They both are removed the same way.

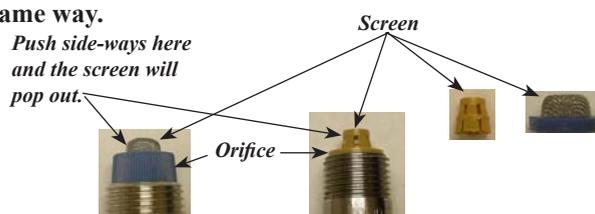


2. Looking into the orifice with the screen removed you will see a "Screw Driver Slot" in the middle of the orifice. You can adjust the water flow by turning the slot with your screwdriver. The slot is tight inside the orifice; it is manufactured this way to prevent the holes from being covered up by vibration moving the slotted disc. The nipples come from the factory set to the highest water flow setting, if you want to reduce the water flow you can turn the slot to a smaller hole.

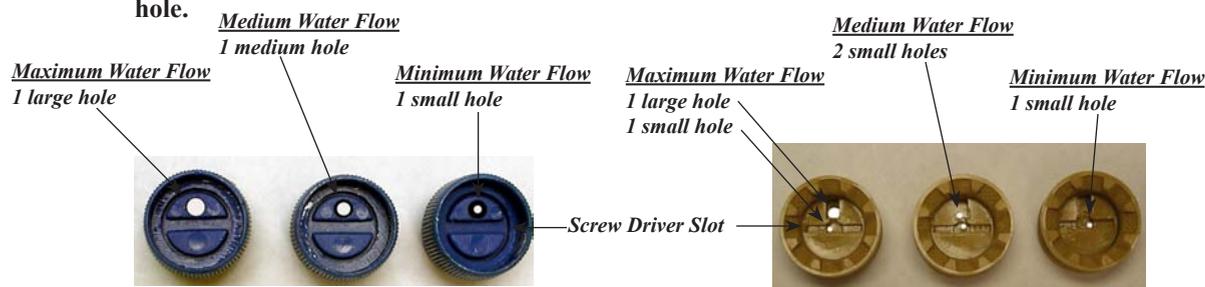

3. On the Gold Orifice, if you need to remove the orifice locate a quarter (25 cents). The quarter will fit very well into the grooves manufactured into the orifice rim. Turn counter clock wise with the quarter. After you remove the orifice the spring and trigger will fall out. The Blue Orifice you can remove by hand turning.

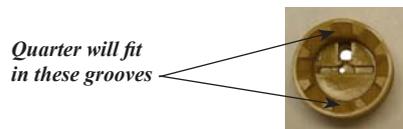

4. Put the nipple back together, the trigger goes first then the spring, and screw in the orifice and snap the screen into the back of the orifice.



Please feel free to call us at 1-800-279-170 if you have additional questions.

Beck Sales Company., 'dba' TROJAN SPECIALTY PRODUCTS
10860 U.S. Hwy 50 — P.O. Box 1735 — Dodge City, Ks 67801
Toll Free: 800-279-1770 — Phone: 620-225-1770 — FAX: 620-225-6521
E-mail: info@becksales.net — Web: www.trojanlivestock.com