



EVENGROW®
RADIANT AGRICULTURAL HEATER



SUPERIOR
RADIANT PRODUCTS

**AWARD WINNING
PATENTED TECHNOLOGY
WIDELY USED IN
NORTH AMERICAN
APPLICATIONS**

**ONLY LOW CLEARANCE
RADIANT TUBE HEATER
THAT ELIMINATES
THE HOT SPOT**


**WASH DOWN
READY**

**SRP EVENGROW® MODEL ALTX
TWO STAGE INFRARED HEATERS**


The SRP EVENGROW® ultimate heater offers the best premium features available in the poultry industry for optimum production and greater return on investment.

- Patented SRP EVENGROW® technology eliminates “hot spot”
- Improved growth rates
- Less bird dehydration
- Best reliability in harsh environments
- Anti-corrosion construction
- Sealed maintenance-free blower motor
- Low clearances above
 - minimal convective heat loss
 - safe for plastic drop ceiling
- Nickel plated “Jet Stream” burner cup
- High efficiency
- Maximum energy is delivered to the floor
- Optional energy efficient side reflectors
- Optional “Flapper” to prevent cold air infiltration


Model ALTX

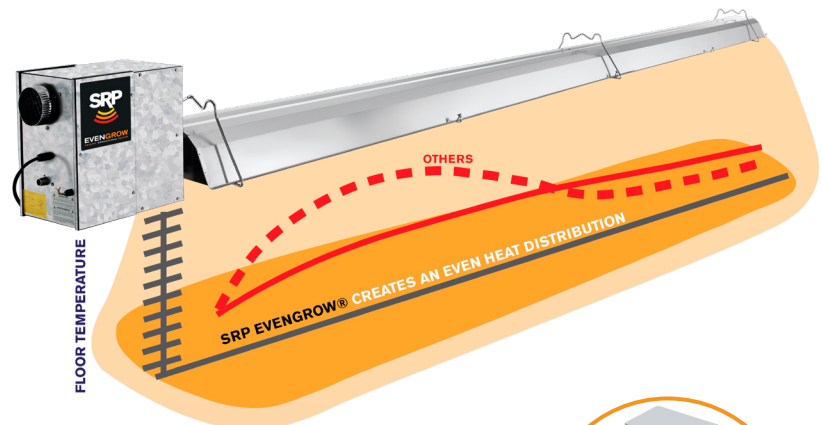

**100% EFFICIENT
REFLECTOR
ON ALL MODELS**



The “Flapper”
Optional Hinged Vent Terminal



**SAVING ENERGY FOR FUTURE GENERATIONS
WWW.SUPERIORRADIANT.COM**

SPECIFICATIONS

SRP EVENGROW® MODEL ALTX, LOW EVEN HEAT TWO STAGE RADIANT AGRICULTURAL HEATER

MODEL NG or LPG	HIGH FIRE RATE BTU/HR	LOW FIRE RATE BTU/HR	MIN. LENGTH (ft.)	MAX. LENGTH (ft.)	BAFFLE LENGTH (ft.)
ALTX-60	60,000	45,000	30	50	12
ALTX-80	80,000	60,000	40	60	6
ALTX-100	100,000	75,000	50	50	Three 4'

ELECTRICAL SUPPLY

120 VAC 60 Hz 1A
60" grounded
plug connector

GAS CONNECTION

NG and LPG
1/2" NPT

TUBE DIAMETER

Combustion air 4"
Flue 4"

MINIMUM GAS INLET

Natural gas 5.0" W.C.
LPG gas 11.5" W.C.


STANDARD EQUIPMENT INCLUDES

- Sealed burner housing assembly c/w potted ignition module
- Aluminized tubing with gasket
- Combustion air inlet collar
- Turbulators when required
- All tube, reflectors, couplings, end caps and hanging accessories as per specified length

OPTIONAL EQUIPMENT

- The "Flapper" hinged vent terminal
- Standard vent terminal
- U or L bends for specific layouts
- Side reflectors and brackets
- Lower shields and brackets
- Thermostats, 24V or 120v
- Chain kits

DIMENSIONS (Inches)

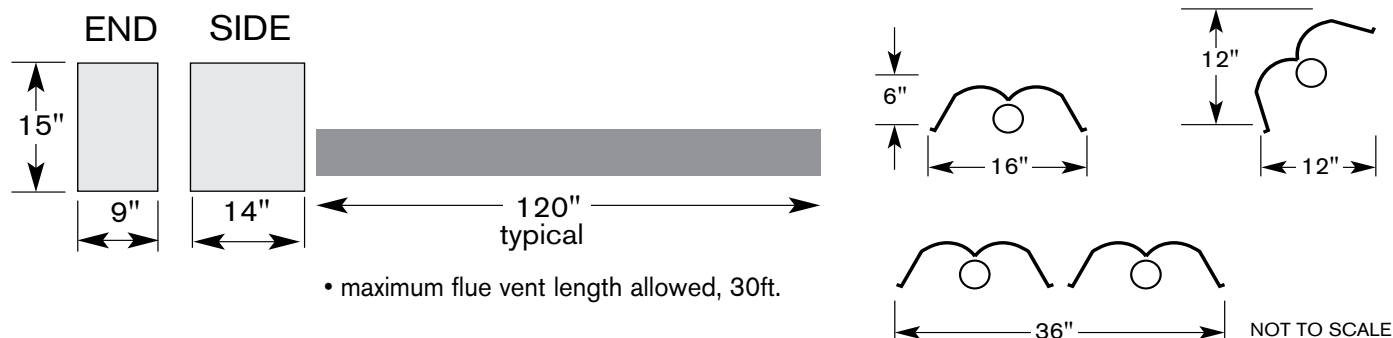

CLEARANCES TO COMBUSTIBLES (Inches)

MODEL	ALTX 60			ALTX 80			ALTX 100		
Configuration	Top	Side	Below	Top	Side	Below	Top	Side	Below
Straight-Horizontal	2	4	31	2	4	31	2	6	36
Straight-45° Tilt	3	3-18	18	3	3-18	18	4	3-20	20
U-Tube Horizontal	2	4	32	2	4	32	2	6	38

- Other layout configurations are approved
- Side reflectors and lower shields are available

- Lower clearances are allowable at 25' from burner
- See installation manual for complete information

Visit our website for I/O manual



SUPERIOR
RADIANT PRODUCTS



Superior Radiant Products Ltd.
563 Barton Street
Stoney Creek ON L8E 5S1 Canada

Superior Radiant Products Inc.
315 N Madison Street
Fortville, IN 46040 USA

1 800 527 HEAT(4328) | tel 1 905 664 8274 | fax 1 905 664 8846
sales@superiorradiant.com | www.superiorradiant.com

SAVING ENERGY FOR FUTURE GENERATIONS

DISTRIBUTOR