



EVENGROW®
RADIANT AGRICULTURAL HEATER



SUPERIOR
RADIANT PRODUCTS

**AWARD WINNING
PATENTED TECHNOLOGY
WIDELY USED IN
NORTH AMERICAN
APPLICATIONS**

**ONLY LOW CLEARANCE
RADIANT TUBE HEATER
THAT ELIMINATES
THE HOT SPOT**


**WASH DOWN
READY**

**SRP EVENGROW® MODEL ALTX
HIGH EFFICIENCY HEATERS**


The SRP EVENGROW® radiant tube heater offers the best premium features available in the agricultural industry for optimum production and greater return on investment.

- Patented SRP EVENGROW® technology eliminates “hot spot”
- Improved growth rates
- No hot spots for maximum comfort of penned animals
- Reduced crowding
- Single or two stage control capability
- Best reliability in harsh environments
- Anti-corrosion construction
- Sealed maintenance-free blower motor
- Low clearances above reflector assures it is safe for plastic drop ceilings and feed lines
- Nickel plated “Jet Stream” burner cup
- High efficiency, maximum energy is delivered to the floor
- Optional “Flapper” to prevent cold air infiltration


Model ALTX

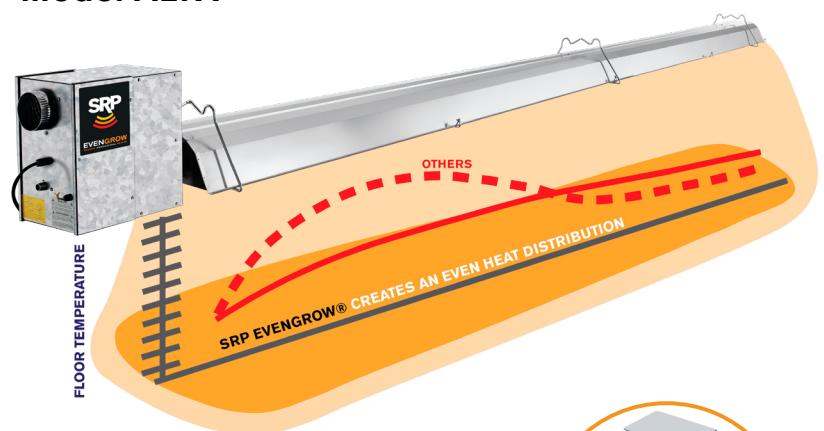

**100% EFFICIENT
REFLECTOR
ON ALL MODELS**



The “Flapper”
Optional Hinged Vent Terminal



**SAVING ENERGY FOR FUTURE GENERATIONS
WWW.SUPERIORRADIANT.COM**

SPECIFICATIONS

SRP EVENGROW® MODEL ALTX, LOW EVEN HEAT TWO STAGE RADIANT AGRICULTURAL HEATER

MODEL NG OR LPG	HIGH FIRE RATE BTU/HR	LOW FIRE RATE BTU/HR	LENGTH (FEET)	ELECTRICAL RATING 120 VAC 60 Hz 1A 60" grounded plug connector	GAS CONNECTION 1/2" NPT
ALTX-60	60,000	45,000	30	TUBE DIAMETER Combustion air 4" Flue 4"	MINIMUM GAS INLET Natural gas 5.0" W.C. LPG gas 11.5" W.C.
ALTX-80	80,000	60,000	40		
ALTX-100	100,000	75,000	50		


STANDARD EQUIPMENT INCLUDES

- Sealed burner housing assembly c/w potted ignition module
- Aluminized tubing with gasket
- Combustion air inlet collar
- Turbulators when required
- All tube, reflectors, couplings, end caps and hanging accessories as per specified length

OPTIONAL EQUIPMENT

- The "Flapper" hinged vent terminal
- Standard vent terminal
- U or L bends for specific layouts
- Side reflectors and brackets
- Lower shields and brackets
- Thermostats, 24v or 120v
- Chain kits

DIMENSIONS (Inches)

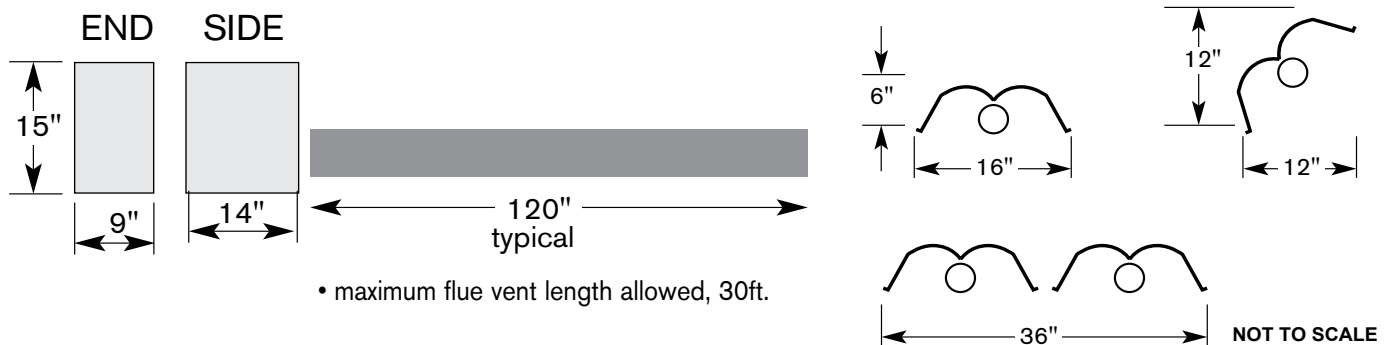

CLEARANCES TO COMBUSTIBLES (Inches)

MODEL	ALTX 60	ALTX 80	ALTX 100
Configuration	Top Side Below	Top Side Below	Top Side Below
Straight-Horizontal	2 4 31	2 4 31	2 6 36
Straight-45° Tilt	3 3-18 18	3 3-18 18	4 3-20 20
U-Tube Horizontal	2 4 32	2 4 32	2 6 38

- Other layout configurations are approved
- Side reflectors and lower shields are available

- Lower clearances are allowable at 25' from burner
- See installation manual for complete information

Visit our website for I/O manual



SUPERIOR
RADIANT PRODUCTS



Superior Radiant Products Ltd.
563 Barton Street
Stoney Creek ON L8E 5S1 Canada

Superior Radiant Products Inc.
315 N Madison Street
Fortville, IN 46040 USA

1 800 527 HEAT (4328) | tel 1 905 664 8274 | fax 1 905 664 8846
sales@superiorradiant.com | www.superiorradiant.com

DISTRIBUTOR

SUPERIOR TECHNOLOGY SUPERIOR PERFORMANCE