




EVENGROW
RADIANT AGRICULTURAL HEATER




SUPERIOR
RADIANT PRODUCTS

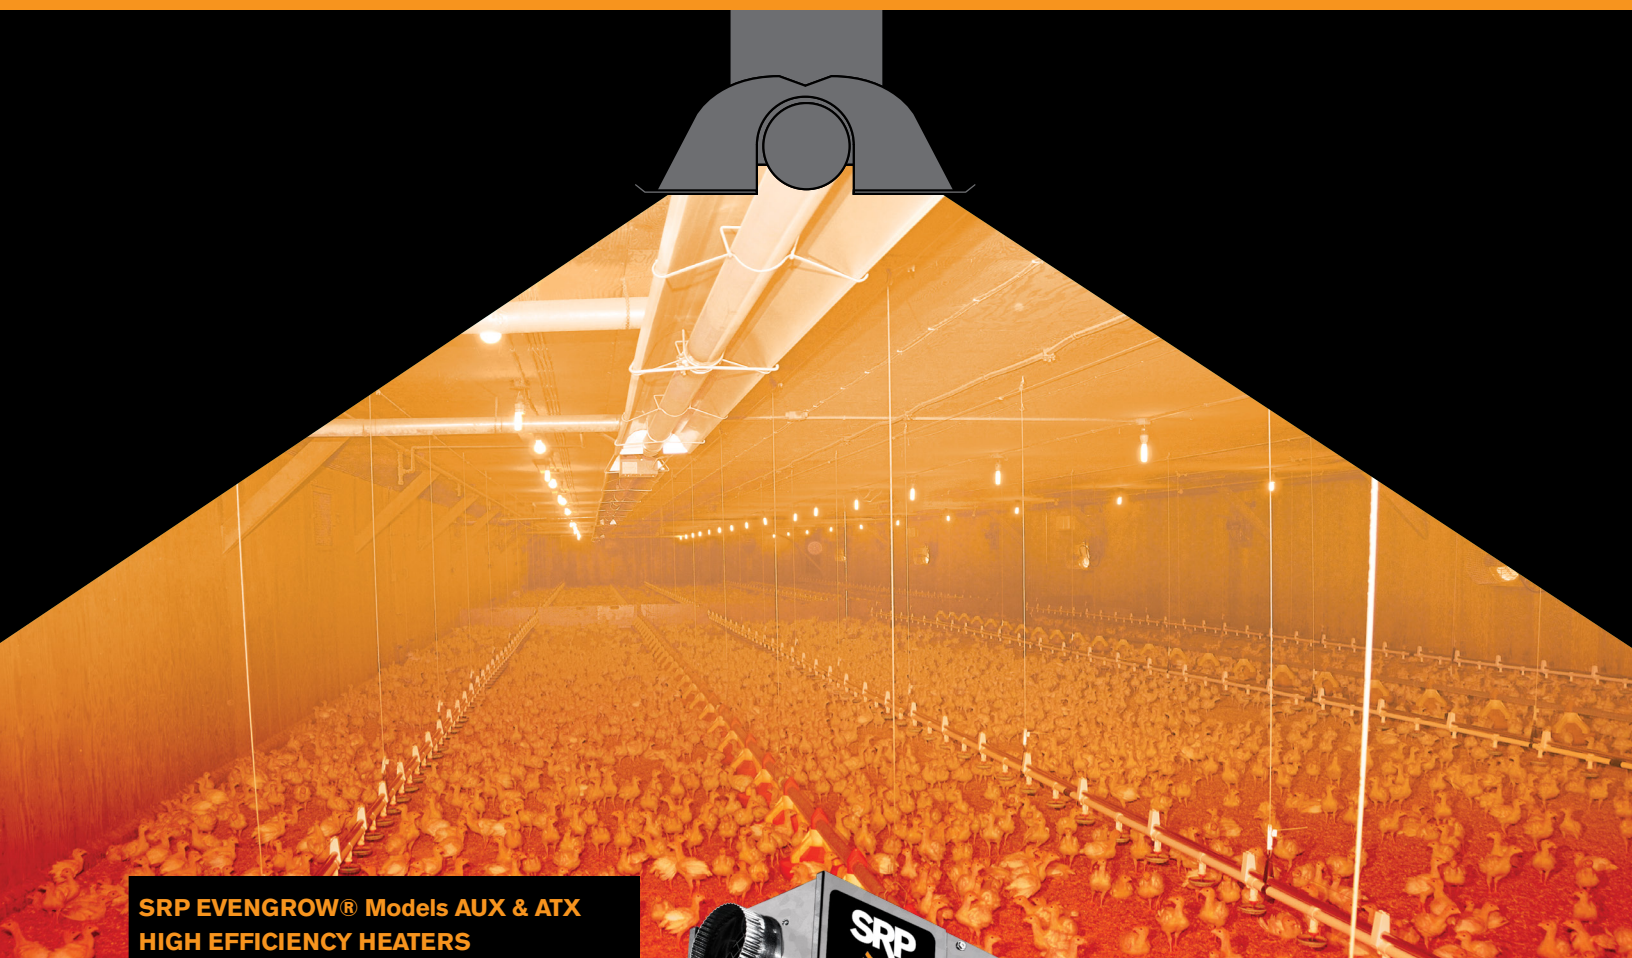

**SRP EVENGROW® Models AUX & ATX
HIGH EFFICIENCY HEATERS**


The SRP EVENGROW® Models AUX and ATX infrared tube heaters offer premium high efficiency features for the agricultural industry with special anti-corrosion construction for harsh environments.

- Waterproof housing for best reliability
- Potted ignition modules
- Nickel plated "Jet Stream" burner cup
- 100% efficient reflector mounted horizontally for minimal convective heat loss and ensuring maximum energy is delivered to the floor
- Optional tilted reflector or energy efficient side reflectors for wall mounting
- Sealed maintenance-free PSC blower motor
- Low clearances above for installation close to ceilings
- Use with optional "Flapper" to prevent cold air infiltration when the heater is not running

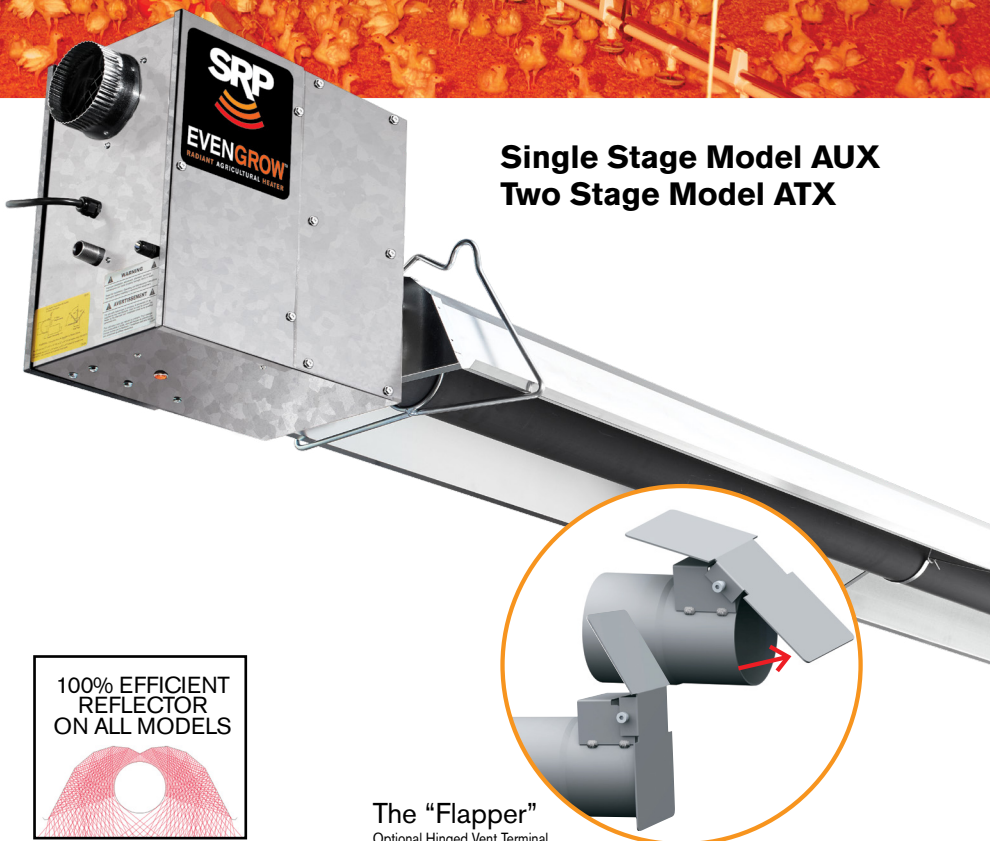

**Single Stage Model AUX
Two Stage Model ATX**

**100% EFFICIENT
REFLECTOR
ON ALL MODELS**



The "Flapper"
Optional Hinged Vent Terminal

SAVING ENERGY FOR FUTURE GENERATIONS
WWW.SUPERIORRADIANT.COM

SPECIFICATIONS

SRP EVENGROW® RADIANT AGRICULTURAL HEATER SERIES

MODEL RATE BTU/HR MIN. LENGTH MAX. LENGTH

	NG or LPG	(FEET)	(FEET)
AUX-60	60,000	20	30
AUX-80	80,000	20	40
AUX-100	100,000	20	50
AUX-125	125,000	30	50
AUX-150	150,000	40	60
AUX-175	175,000	50	60

ATX-40	40,000 / 30,000	10	20
ATX-60	60,000 / 45,000	20	30
ATX-80	80,000 / 60,000	20	30
ATX-100	100,000/ 75,000	20	30
ATX-125	125,000/ 95,000	30	50


STANDARD EQUIPMENT INCLUDES

- Sealed burner housing assembly c/w potted module
- HT Aluminized tubing with gasket
- Combustion air inlet collar
- Turbulators when required
- All tube, reflectors, couplings, end caps and hanging accessories per specified length

OPTIONAL EQUIPMENT

- The "Flapper" hinged vent terminal
- Standard vent terminal
- U or L bends for specific layouts
- Side reflectors and brackets
- Lower shields and brackets
- Thermostats, 24v or 120v
- Chain kits

DIMENSIONS (Inches)

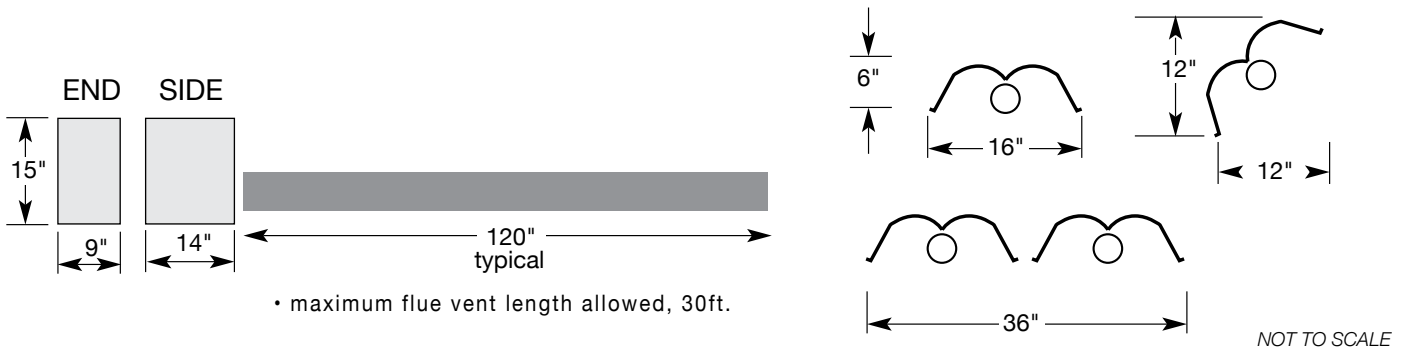

CLEARANCES TO COMBUSTIBLES (Inches)

MODEL	AUX/ATX 60			AUX/ATX 100			AUX/ATX 125			AUX 175			SPECIFICATIONS	
	Top	Side	Below	Top	Side	Below	Top	Side	Below	Top	Side	Below	ELECTRICAL RATING	GAS CONNECTION
Configuration													120 VAC 60 Hz 1A 60" grounded plug connector	1/2" NPT
Straight - Horizontal	2	25	58	2	30	67	4	33	71	6	40	78		
Straight - 45° Tilt	4	4-46	50	4	4-58	67	6	4-63	70	8	4-67	74		
U-Tube Horizontal	2	25	59	2	30	71	4	34	74	6	40	78	TUBE DIAMETER Combustion air 4" Flue 4"	MINIMUM GAS INLET Natural gas 5.0" W.C. LPG gas 11.5" W.C.

- Other layout configurations are approved
- Side reflectors and lower shields are available
- Lower clearances are allowable at 25' from burner
- See installation manual for complete information

Visit our website for I/O manual and specifications



SUPERIOR
RADIANT PRODUCTS



Superior Radiant Products Ltd.
563 Barton Street
Stoney Creek, ON L8E 5S1 Canada

Superior Radiant Products Inc.
315 N Madison Street
Fortville, IN 46040 USA

1 800 527 HEAT(4328) | tel 1 905 664 8274 | fax 1 905 664 8846
sales@superiorradiant.com | www.superiorradiant.com

SAVING ENERGY FOR FUTURE GENERATIONS

DISTRIBUTOR