


JD2600 Insulated Attic Air Inlet



JD2600 Inlet in Closed Position



Two-Stage Shut-off to protect from wind pressure



JD2600 Actuated Inlet can also be single pulled



JD2600 Gravity Air Inlets installed in Hog Barn



JD2600 ACTUATED



JD2600 GRAVITY

Inlets are activated automatically by negative pressure or actuated with machine

ACTUATED Part No. 90840

CFM: Approx. 2,400 @ 0.05 SP

Rough Opening: 29" x 24.5"


Ship Weight: Approx. 13 lbs

GRAVITY Part No. 90841

CFM: Approx. 2,400 @ 0.05 SP

Rough Opening: 29" x 24.5"

Ship Weight: Approx. 13 lbs

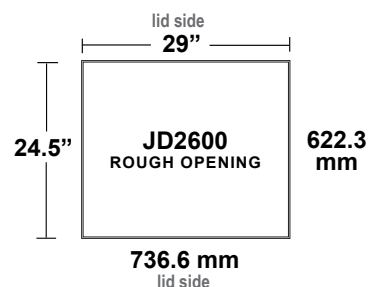

- Great for minimum to maximum ventilation when you need precise control of air movement.
- Each lid is fully covered with a seal around the perimeter.
- 1" thick fully insulated, durable lids direct air along the ceiling for proper air mixing and minimize condensation, dripping, and freezing of inlet.
- Noncorrosive continuous hinge swings down to allow clean attic air into the main room.
- Gravity Inlet lids have adjustable counterweights to regulate airflow. Actuated Inlet includes actuated kit with pull string and winch block.
- Used for year round ventilation. All inlets are constructed with removable insulation stops and include pre-installed mounting screws.

